


S3219 PLUS

ELECTRIC SCISSOR LIFT

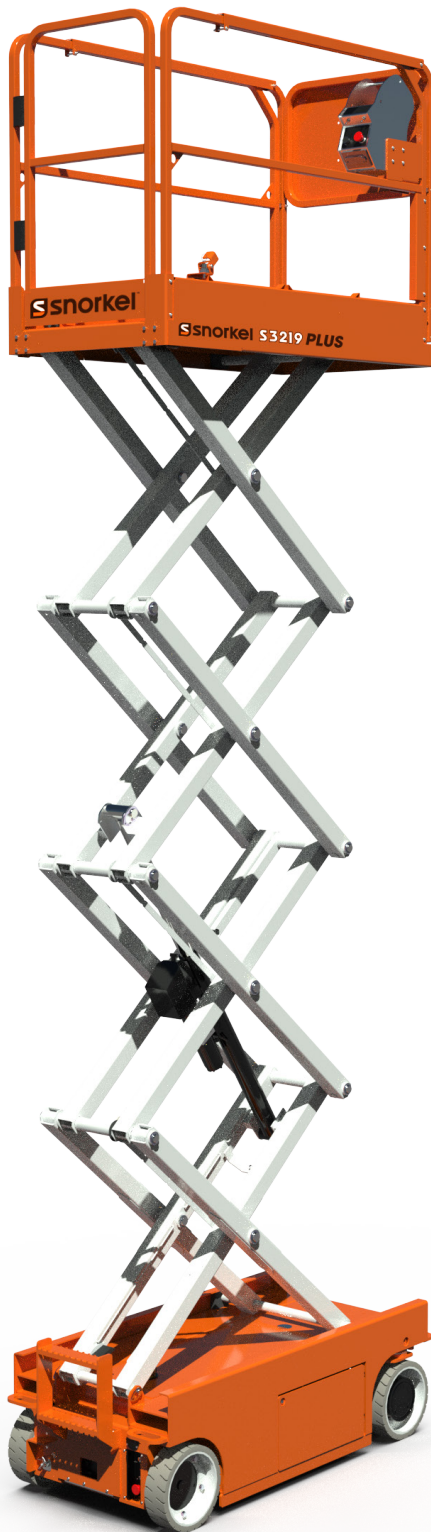

- Electrically operated
- No hydraulic hoses
- Low step-in platform height
- NO FOLDING RAILS
- Fits standard doorways
- Large non-marking tires
- Indoor/Outdoor operation

snorkel[™]
www.snorkellifts.com

ELECTRIC DRIVE SLAB SCISSOR LIFT

S3219 PLUS

DIMENSIONS

Max. Working Height	7.79m
Max. Platform Height (A)	5.79m
Platform Size (Stowed)	0.8m x 1.75m
Platform Size (Extended)	0.8m x 2.66m
Deck Extension Length	0.91m
Overall Length (C)	1.8m
Overall Width (D)	0.81m
Stowed Height (B)	1.98m
Ground Clearance (Stowed)	0.06m

PERFORMANCE


Platform Capacity (SWL)	272.1kg
Max. Wind Speed	12.5m/s
Max. Drive Height	5.79m
Max. Drive Speed (Stowed)	4kph
Max. Drive Speed (Elevated)	0.8kph
Raise/Lower Time	35/20 sec
Gradeability	25%
Max. Operation Slope (side-to-side)	1.5 degrees
Max. Operation Slope (front-to-back)	4 degrees
Tires	0.32m
Controls	Proportional
Drive System	Dual DC Motors
Parking Brake	2-wheel, spring applied

POWER

Power Source	Four (4) 6V 213Ah AGM Batteries
Charger	10.5A

WEIGHT

Weight	1308kg
--------	--------

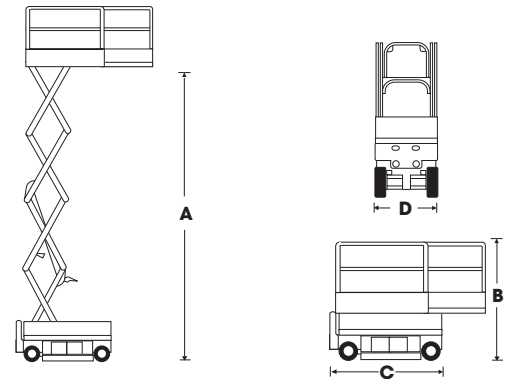

STANDARD FEATURES

- 100% Operation 2 person indoor, 1 person outdoor
- AGM battery operated scissor lift
- No hydraulic hoses
- Fits standard doorway *without* folding rails
- Roll-out-deck with dual locks
- Non-marking tires—largest wheels/tires in class
- Heavy-duty spindles/steering
- Heavy-duty fixed control box
- Descent and all-motion alarms
- CE approved
- Proportional control, all functions
- Platform overload protection
- 110 V (15 amp) power to platform
- On-board diagnostics, hour meter, battery meter
- Automatic integrated battery charger
- Manual safety lowering system
- Flashing amber strobe
- Forklift pockets, crane lifting points
- Lanyard attachment points
- Swing-out service trays
- 2-year parts & labour warranty
- 5-year structural warranty



TAKE A TOUR



P: 08 9302 6800

E: sales@waliftingequipment.com.au

A: Unit 9, 9 Inspiration Drive Wangara 6065 WA